




TS PERFORMANCE

WE ARE DIESEL

MP-8

1110501

Jeep Liberty



Thank you for buying the MP-8 for the 2.8L Jeep Liberty Light Duty. Here you will learn how to install this MP-8 into your truck, and we guarantee that you will be satisfied with our product. Before you get started check to make sure that you have everything below in the contents that came in the box

Installation Manual

Contents:	
MP-8 Module Switch (TSP100)	Harness (TSP01JP) Zip Ties (4)

- Increase of 50HP
- Increase Fuel Mileage by 2-3MPG
- On-The-Fly Adjustable
- When removed leaves no trace of modification or foot prints.

**Horsepower increases as you turn the knob clockwise.
0-50HP.**


Continued

Installation of TS Performance Power Play MP-8 Jeep Liberty 2.8L

**Read all instructions and fully understand them before installing your TS Performance MP-8 module
disconnect the battery terminals and remove keys from the ignition before installation.**

Place Di-Electric Grease onto every electrical connection.

1. First you need to find the proper location for mounting the module. We recommend the fuse box located on the driver's side of the engine compartment in front of the battery. Velcro the module to the fuse box.
2. Remove the oil fill cap and plastic engine cover. This will allow you to see the sensors that you need to plug into.
3. Locate the MAP Sensor, It will be located on the driver's side of the engine toward the rear, just below the wiper cowl. It will have a 4 Pin connector plugged into it. Disconnect the factory connector and plug it into our harness, and our harness into the sensor.
4. Locate the Fuel Pressure Sensor just in front of the MAP Sensor. It will have an orange grommet when disconnected and will be a 3 pin connector. Plug the factory connector into our harness and our harness into the sensor.
5. Mount the switch in the dash in an area the driver can access easily.
6. Route the adjustable switch through the firewall and to the MP-8 module.
7. Before finishing be sure that all the connections are tight. Now re-install the plastic engine cover, tighten the oil fill cap, and re-attach the batteries.

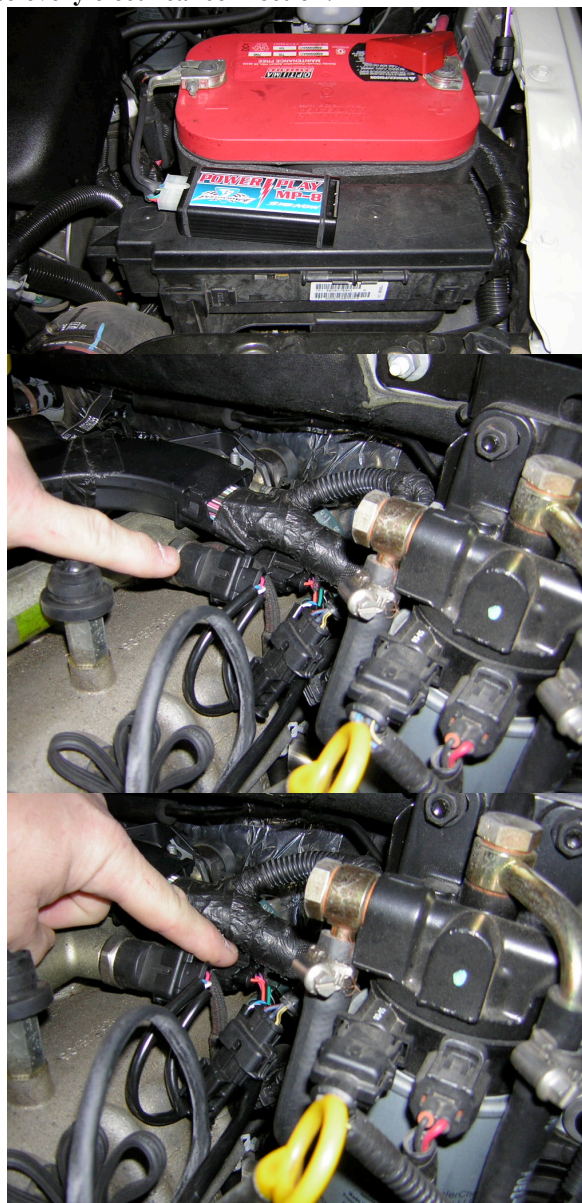

If there are any questions on the product or installation of the module give us a call at
TS Performance (270) 746-9999

Continued



TS Performance
851 Lovers Ln
Bowling Green, KY 42103
270-746-9999
www.tsperformance.com

DISCLAIMER

READ CAREFULLY BEFORE INSTALLING ANY TS PERFORMANCE PRODUCT

REMEMBER THIS IS A HIGH PERFORMANCE PRODUCT. USE AT YOUR OWN RISK. FOR OFF ROAD USE ONLY.

Do not use this product until you have carefully read the following agreement. This agreement sets forth the terms and conditions for the use of the TS Performance product. The installation of this product indicates that the buyer has read and fully understands this agreement and accepts its terms and conditions.

DISCLAIMER OF LIABILITY

TS Performance, its distributors or dealers shall in no way be responsible for the product's proper use and service. The buyer of this system hereby waives all liability claims. The buyer acknowledges that he is not relying on the seller's skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the buyer hereby waives all remedies or liabilities, expressed or implied arising by law or otherwise, (including without obligations of the seller with respect to fitness, merchantability and consequential damages) or whether or not occasioned by the seller's negligence.

The seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the buyer agrees to indemnify the seller and to hold the seller harmless from any claim related to the item of the equipment purchased. Under no circumstances will the seller be liable for any damages or expenses by reason of use or sales of any such equipment.

The seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt the manufacturer is to be contacted.

LIMITED LIFETIME WARRANTY

STATEMENT POLICY

- The warranty policy is the best warranty within the high performance diesel industry.
- All **TS Performance** products have been inspected, tested and trial in the factory laboratories and on the field.
- Nothing in this Statement of Policy shall alter or enlarge the terms of warranties, obligation or liabilities of these products.
- **TS Performance** is not responsible or liable for any products damaged or destroyed due to improper installation.

TERMS OF WARRANTY

- The defective product must be freight prepaid and returned to **TS Performance** for further investigation, otherwise this warranty shall be deemed null and voided and of no effect.
- This warranty is void on any products that show evidence of misapplication, negligence, improper installation, and abuse, lack of proper maintenance or alternation from its original design.
- In no event will **TS Performance** be liable for any consequential or incidental damages for breach of any express or implied warranty on the product.
- This warranty is not transferable or assignable.
- **TS Performance** is not responsible or liable for any products damaged or destroyed due to improper installation.

IN THE EVENT THAT THE BUYER DOES NOT AGREE WITH THIS AGREEMENT: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT IN A NEW AND UNUSED CONDITION WITH A DATED PROOF OF PURCHASE TO THE PLACE OF PURCHASE WITHIN TEN (10) DAYS FROM DATE OF PURCHASE FOR A FULL REFUND.

THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTANDS THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.

Continued

TS PERFORMANCE
Products and Other Info found on the
WWW.TSPERFORMANCE.COM

FOR TECHNICAL SUPPORT
(270) 746-9999



WE ARE DIESEL