

### BD Steering Box Support (SBS)

1022002	1994-2002	2500-3500 2WD
1032002	1994-2001	1500 2WD
1032004	1994-2002	2500-3500 4WD
	1994-2001	1500 4WD
1032005	2003-2008	2500-3500 4WD
1032006	2009-2011	2500-3500 4WD

### PLEASE READ ALL INSTRUCTIONS BEFORE INSTALLATION

Some 2wd drive application utilize a sold axle, for these applications please use the 4wd SBS unit Part# 1032004, 1032005, 1032006

### KIT CONTENTS:

Please check to make sure that you have all the parts listed in this kit **before** you start the disassembly of your truck.



1302010Z	1302017	1040150	1040153	1040152
		T		
Sector Shaft Bolt	Bearing Assembly	Cap Screw ½" x 1 ½"	Flat Washer	Lock Washer
Qty: 1	Qty: 1	Qty: 2	Qty: 2	Qty: 2

1040151	1302020	1302028	1452815
	Commossie		
½" Nut	Thread Lock	Frame Bolt M10 x 1.5" x 35mm	Frame Washer M10
Qty: 2	Qty: 1	Qty: 4	Qty: 4



NOTE: For this kit you will require a 1-1/2" socket as the kit utilizes a large sector shaft nut.

#### Welcome

Thank you for purchasing a BD Steering Box Support. This manual is divided into different areas to assist you with your installation and operation of your steering box support system.

This product is not a replacement for a new steering box and/or ball joints, but it will aid in reducing the stress placed on the steering box and associated wear. All steering components should be checked and replaced if necessary prior to addition of the steering box support.

Installation should occur on a vehicle properly secured to prevent rolling.

Application of lubrication at regular chassis lube intervals will promote bearing life.



# THIS PRODUCT IS <u>NOT</u> SAFE TO USE AS A TOWING OR WINCHING ATTACHMENT POINT.



### Required Tools

- 15mm, 17mm & 19mm Socket / Wrench
- (BD # 1032006 only) 1-1/2" Socket
- 1-5/16" and 1-1/4" Socket/Wrench
- 1/8" Allen wrench
- Torque Wrench (40-180 lbs-ft).
- Never seize

### Maintenance

Grease bearings at regular oil change intervals for optimal protection of bearing from wear and contamination due to environment.


#### INSTALLATION




## \*\* CAUTION \*\* THE SWAY BAR WILL DROP WHEN BOLTS ARE REMOVED, SO REMOVE WITH CAUTION.

Hold onto or otherwise support the sway bar.

Remove the four mounting bolts (15mm) that secure the sway bar to the frame.

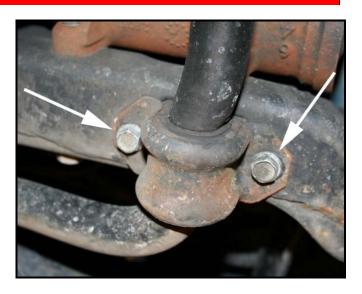

Allow the sway bar to swing down and rest onto the steering linkage.

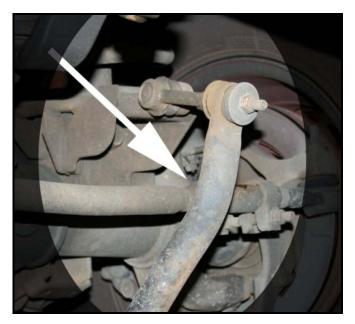

A **1-5/16**" **socket** will be required to remove the steering box sector shaft bolt with lock washer. Retain the lock washer for re-installation with the new nut.

Note: If the vehicle is a 2009-11 a 46mm socket will need to be used.



A 1-1/4" deep socket (180 lbs-ft) should be used to install the new sector shaft nut, re-using the stock lock washer.

NOTE: If installing a 1032006 kit you will need a 1-1/2" deep socket (180 lbs-ft).



Slide the support bar into place, where the mounting feet are positioned in between the sway bar mounting and the frame.


When the sway bar is moved into place, the large diameter hole on the bearing plate will be approximately centered on the sector shaft nut.



Apply Loctite. Install (**snug**, **not tight**) four of the supplied **17mm** bolts with washers to re-secure the sway bar and SBS to the frame, while allowing for final mounting position to be fine tuned.


The bracket is aligned when the sector shaft nut is centered in the hole.

\*\*\* It may be necessary to loosen the sway bar end link bolts to ease this process. (15mm)

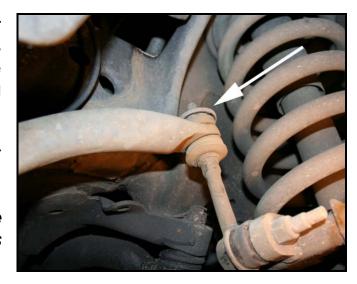


Install two bolts through the small holes in bearing mounting area, so that the threads are hanging through the bracket.

\*NOTE\*: Before installing the bearing assembly, apply some Anti-seize to the sector shaft to help assist future removal.

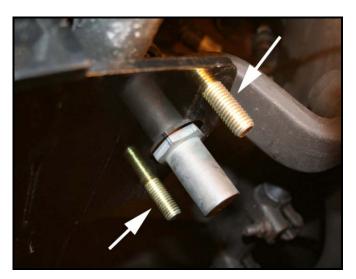

Install the bearing assembly over the sector shaft nut until the bearing block comes to rest on the support bracket (noting that the block may not be flat to the mount at this point).

Install the lock washer and nut to the two bolts protruding through the bearing assembly (snug but do not tighten).

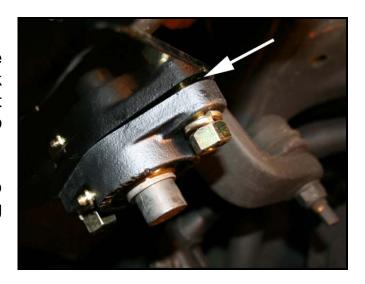


Tighten the four sway bar mounting bolts (17mm) to 40 lbs-ft. (as per Dodge's specification).




Ensure free movement (rotation) of the steering box sector shaft nut. If it is not free moving, then undo the sway bar bolts and readjust.

Tighten the bearing lock washers and nuts (19mm).

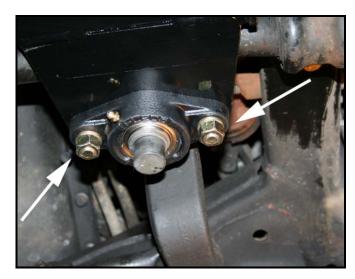

Remove the set screws and apply LocTite.

Install and tighten the set screws (3/32" Allen wrench).

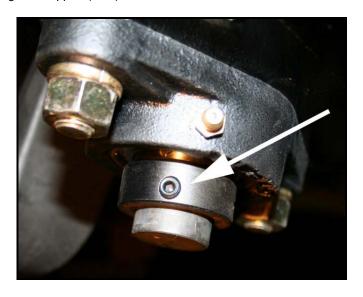

<sup>\*</sup> Check that the zerk grease fitting is tight.

If you have any technical difficulties, concerns, comments, or complaints, please phone our Technical Support hotline at (800) 887-5030 between 8:30am-5:00pm PST (Pacific Standard Time) Monday to Friday, or post a message on the BD Discussion Forums located at:

http://forum.bd-power.com/



Visit our Internet forums at <a href="http://www.dieselperformance.com">http://www.dieselperformance.com</a> and share your comments or technical support questions with some of the industry's leading experts in the diesel field.

<sup>\*</sup> Use a standard grease gun to apply grease to the bearing.