



# **TITANIUM SIGNATURE SERIES PLUS INSTALLATION MANUAL**

**ALL 1/2" FUEL PORTS**




## **APPLICATION:**

**TSP-N16-140F-110G  
(110GPH @ 78PSI)**



**Nissan Titan XD  
5.0L Cummins**

**2016-2019**



**LIFETIME  
WARRANTY  
AVAILABLE**



[www.fassride.com](http://www.fassride.com)

(866) 769.3747

**Thank you for choosing FASS, from  
Diesel Performance Products, Inc.**

FASS specializes in building extremely high-quality fuel products. We have earned an unsurpassed reputation for excellence in our industry by using only the highest-quality American-made components. In order to support our American workers and our American economy, more than 98+ percent of our products are manufactured completely in the United States.

Of course, that dedication to excellence comes at a price, but it is important to remember that price does not dictate quality-quality dictates price! We will never compromise by using cheaper, foreign-made components, like so many of our competitors do.

Customer satisfaction is our top priority and we strive always to provide outstanding customer service. Our Research and Development department, in conjunction with our Dealer Support Department, continually searches for ways to improve quality, expand our product line, and provide superb support. Our exclusive ViP Network ensures that customers receive the proper products and support at the local level. The extended lifetime warranty is only available on products purchased from the network. There is no warranty on products not purchased outside the network.

**IMPORTANT:**

*In order to qualify for the lifetime extended warranty, your product registration form and proof of purchase from an authorized dealer must be submitted to FASS Fuel Systems within 30 days of purchase. Failure to comply will void the warranty. We have the right to deny any warranty believed to be false, altered or purchased through an unauthorized or terminated dealer. A current list of authorized dealers can be found on our website, FASSRide.com.*

The complete conditions of the Limitation of Warranty can be found in the back of this manual, and FASSRide.com.

**For more information,  
contact Technical Support:  
Diesel Performance Products, Inc.  
16234 State Hwy O.  
Marthasville, MO 63357  
636-433-5410**



## **WARNING!**

**This product has NO WARRANTY unless:**

**1. It has been purchased from an **Authorized** or **ViP FASS Dealer**. If in doubt, check **www.FASSRide.com**.**

**2. It is registered within thirty (30) days of purchase.**

**Other conditions may apply. Please see full warranty information.**

***NOTE:* Warranty is **void** if product was purchased below FASS website advertised pricing.**

## **ATTENTION!**

**Before you begin installation**

**Register for your Warranty ONLINE at**

**<https://www.fassride.com/register-a-warranty/>**

**No online access, call our TECH Support at**

**1-866-769-3747**

# **FOLLOW THESE STEPS TO ENSURE A SIMPLE, CORRECT INSTALLATION OF YOUR NEW TITANIUM FUEL SYSTEM**

## **ATTENTION:**

**Be sure to identify the proper FASS System and fuel line configuration. For help, our product finder can be found at [www.FASSride.com](http://www.FASSride.com). Follow the instructions to see fuel line detail.**

- 1** Pay close attention to ALL WARNINGS
- 2** Read all instructions before starting installation of this product.
- 3** Inventory the package components. Notify the place of purchase immediately of any parts missing or damaged.
- 4** The installation recommendations contained within are guidelines. Use good judgment and take into consideration your vehicle's accessories.
- 5** For best results in accuracy and efficiency (due to training, communication, and our relationship with our dealer network), we recommend a VIP FASS dealer for the installation. They are prepared to install the FASS fuel pumps with the most efficiency. If a situation or problem arises during the installation, the dealer is prepared to handle it. Diesel Performance Products, Inc. is not responsible for any installation mistakes.
- 6** If you have any questions or concerns that cannot be addressed with your dealer, email or call FASS.

---

**If any installation procedure is uncertain, contact FASS technical support.  
Call customer service at 636-433-5410,  
or send us an e-mail: [techsupport@FASSride.com](mailto:techsupport@FASSride.com)  
with the following information:**

---

**Your name, address and daytime phone number**  
**Model (TSP-N16-140F-110G)**  
**Last 6 digits of vehicles' VIN**

**Date of purchase**  
**Nature of Your Concern**  
**Serial number** .....



# **INSTALLATION MANUAL**


## **TSP-N16-140F-110G**

(Installation Videos are available at [www.fassride.com](http://www.fassride.com))

### **RECOMMENDED APPLICATION**

**TSP-N16-140F-110G:** Titan XD 5.0L Cummins 2016-2019 with stock - 700 horsepower

1. Read all instructions before starting installation of this product!
2. Installing the improper FASS Pump can cause severe engine damage.
3. Secure vehicle from ROLLING!
4. Cab and Chassis may require modifications
5. Consult vehicle's manufacturers' instructions concerning the electrical system before attempting any electrical connections.
6. Flush and clean all brass fittings and fuel line from debris.
7. Keep debris from entering the internals of the system during installation. Getting debris in the water separator nipple can lock up the motor. If the motor does lock up from debris call FASS for technical assistance.

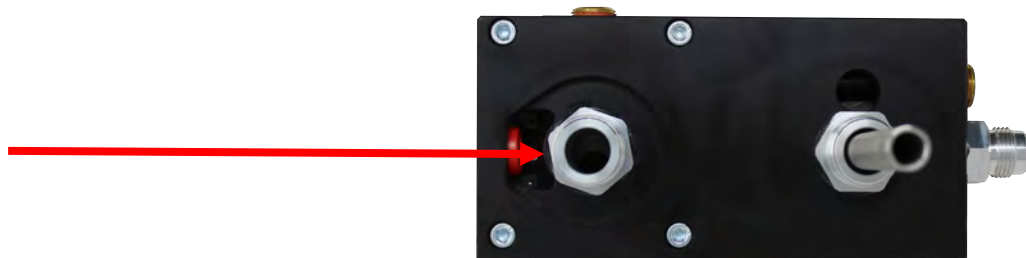


9. Wear safety glasses when operating power tools such as drills and grinders or when using a punch or chisel.
10. Properly secure lines to prevent chaffing.



**WARNING!**

**Always be sure to fill the fuel tank to full after a new FASS installation. Failure to do so can result in excessive sound output, or priming issues!**

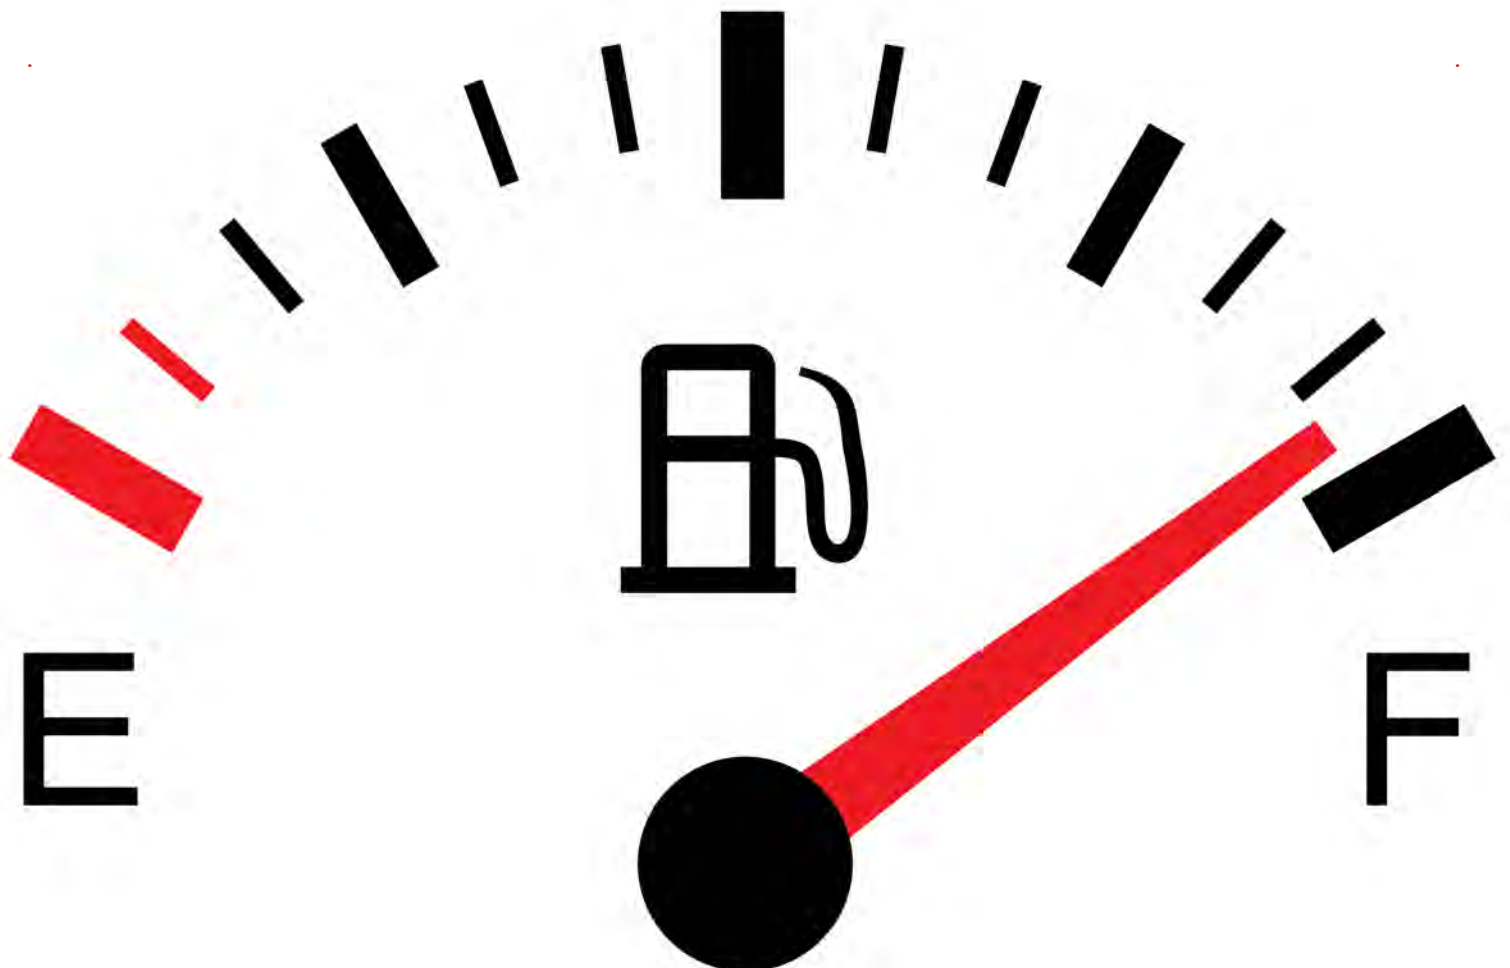




# **TITANIUM SIGNATURE SERIES PLUS 110 GPH**

**78 psi (Approximately)**

Rear View



Front View

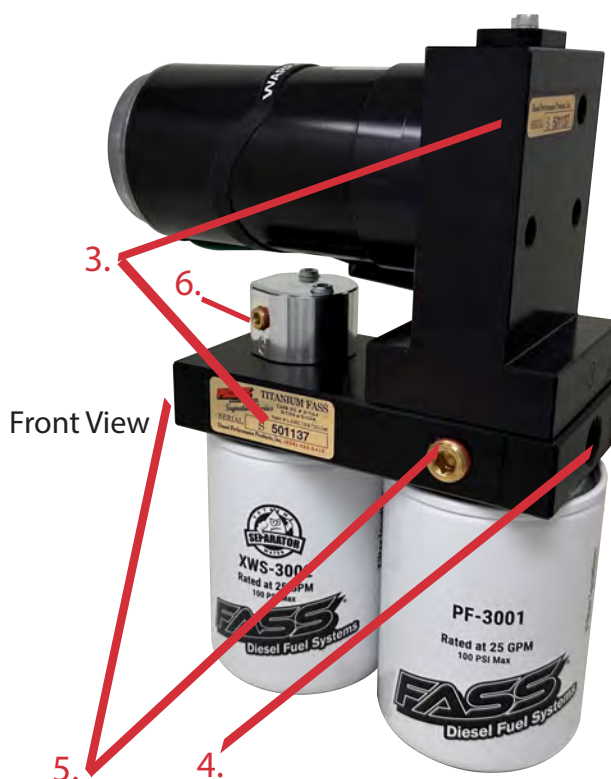

## **PUMP GUIDE:**

- 1. "E" To Engine**
- 2. "R" Return to Tank**
- 3. Serial Number**
- 4. "T" Fuel Inlet**
- 5. Electric Heater Ports**
- 6. "G" Gauge Port**

## **INSTALLATION GUIDE:**

- Step 1. Install Electrical Harness**
- Step 2. Prep the FASS**
- Step 3. Mount the FASS**
- Step 4. Fuel Line Supply**
- Step 5. Review Installation**



**TITANIUM  
SIGNATURE SERIES PLUS  
110 GPH**

[www.fassride.com](http://www.fassride.com)  
(866) 769.3747

**78 psi (Approximately)**

**Note: Going over 100 PSI WILL void warranty.**

**NOTE: WARRANTY MAY BE VOID  
IF SILICONE BAND IS REMOVED  
FROM MOTOR!!**





# CONTENTS

**NOTE:** Owner's Manual available for download on our website,

[www.FASSride.com](http://www.FASSride.com)



**DIELECTRIC GREASE**




**TWO (2)  
OR-017**



**OR-030**

**NOTE: THESE SPARE BASE O-RINGS ARE INCLUDED WITH THE KIT IN THE EVENT OF A PINCHED O-RING DURING ASSEMBLY**

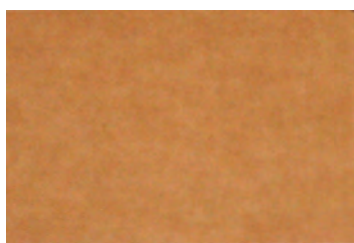

**MP-TSP-9079**



**FL-1058-BK x5'**



**FL-1002-BK x9'**



**WH-1006-3**



**PBR-2002**



**NTFB-1001**

## MOUNTING PACKAGE CONTENTS



**BHF-1010**



**OR-119**



**BHN-1005**



**TWO (2)  
PL-2058-BK**



**TWO (2)  
PL-2003-BK**



**PLB-1212**



**A614C56-55-05**



**AN-10-ORB-10-BK**



**ADD-A-CIRCUIT  
46044**



**AN-8-ORB-10-BK**



**RVC-38**



**46251**



**TWO (2)  
HC-1001**



**DB-1010**



**TWO (2) RING  
TERMINAL**



**FOUR(4) HEX BOLT  
3/8" -16x11/4"**



**THREE(3)  
HEX  
BOLT  
1/4"-20x  
13/4"**




**TWO (2)  
TUBE CLAMP**



**THREE(3) WA-1001D**



**FOUR(4) 3/8" WASHERS**



**RELAY COVER**

## **MOUNTING PACKAGE CONTENTS**



**RS-2002**



**ST-1005P**



**FL-1006**  
5/16" Vltan Tube



**FL-1009**  
3/8" Vltan Tube



**1,200° F**  
Heat Shielding



**CABLE TIES**

## ***STEP 1:*** **INSTALL ELECTRICAL HARNESS**

The installation of the electrical harness is done first, allowing power to be applied to the pump for lubrication purposes later in the installation.

***NOTE: USE SUPPLIED DIELECTRIC GREASE  
SPARINGLY ON ALL ELECTRICAL  
CONNECTIONS! BE SURE TO GREASE RELAY  
PIGTAIL!***





## ***STEP 1:*** **INSTALL ELECTRICAL HARNESS**

The installation of the electrical harness is done first, allowing power to be applied to the pump for lubrication purposes later in the installation.

***Install the Relay Cover onto the relay on the FASS harness.***





## ***STEP 1:*** ***INSTALL ELECTRICAL HARNESS***

The installation of the electrical harness is done first, allowing power to be applied to the pump for lubrication purposes later in the installation.

***NOTE: BE SURE TO INSTALL THE SUPPLIED  
30 AMP FUSE INTO THE FASS WIRING  
HARNESS!!***



## ***STEP 1:*** **INSTALL ELECTRICAL HARNESS**



*The installation of the electrical harness should be completed first. This will allow power to be applied to the pump during installation.*

- A.** Using wire stripping tool, remove excess insulation off the add-a-fuse and the WH-1006-3



## **STEP 1:** **INSTALL ELECTRICAL HARNESS**


**B.** Place wire from 46044 single red bare wire from WH-1006-3 into butt connector. Using crimping tool connect 46044 and WH-1006-3 with butt connector. Install 46260 to 46044 top slot (opening that is near the spade).

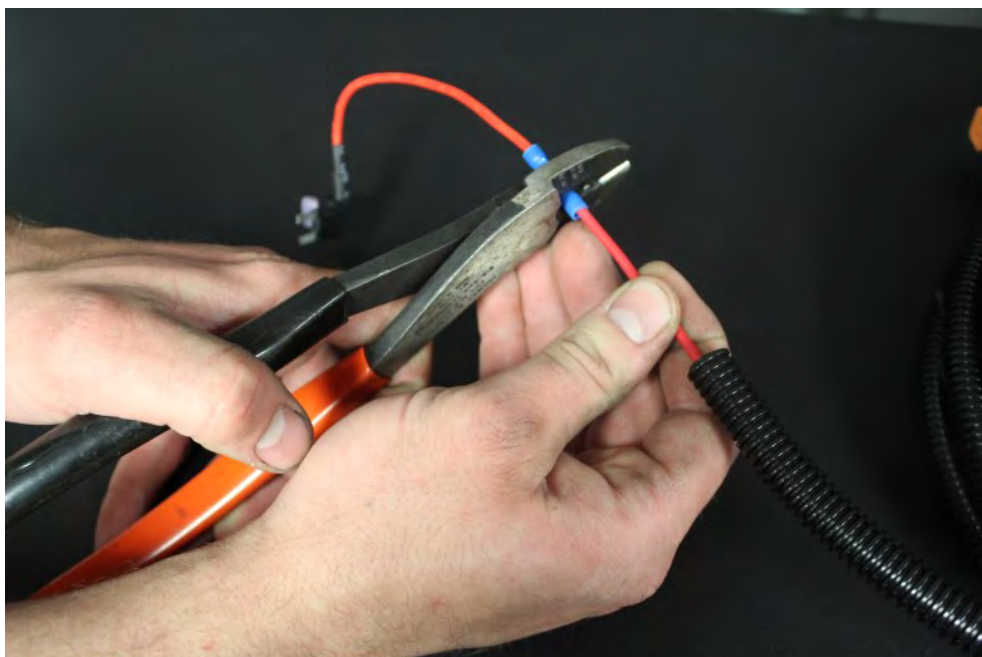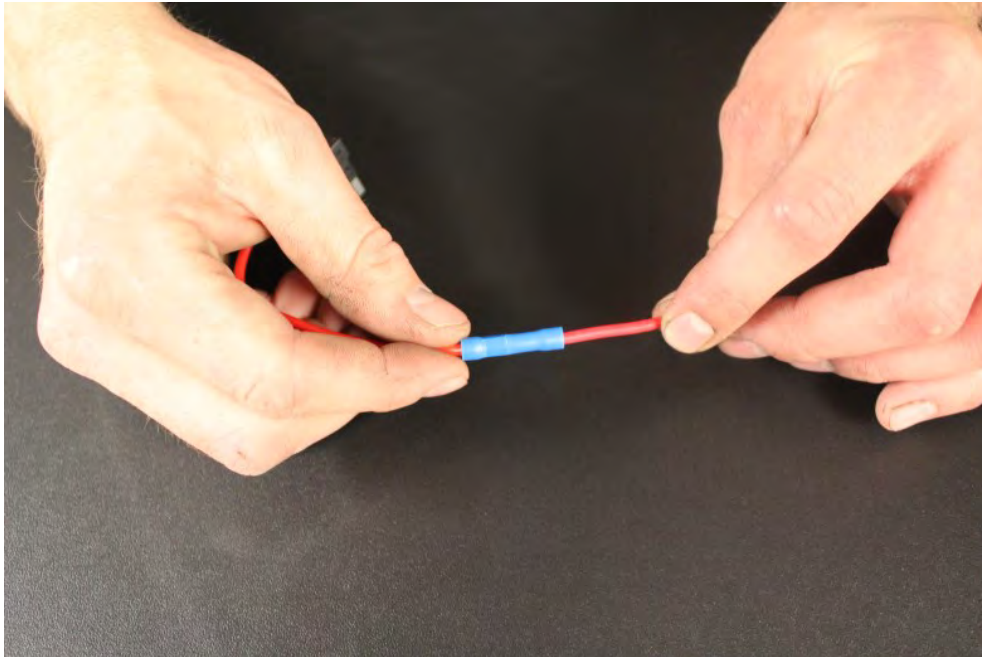





## **STEP 1:** **INSTALL ELECTRICAL HARNESS**

**C.** Crimp the ring terminals to the red and green wires of the WH-1006-3 Wire Harness. Attach red wire to the positive terminal of the battery and the green terminal to the negative terminal. **The use of a corrosion preventative on electrical connections is recommended.**

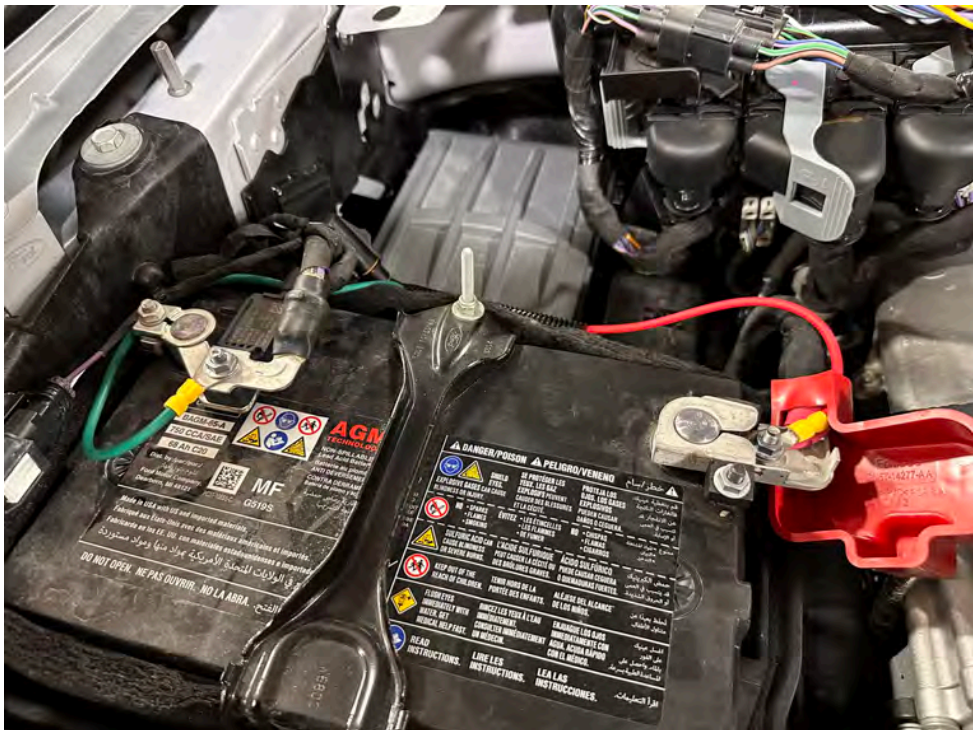

## **STEP 1:** **INSTALL ELECTRICAL HARNESS**

**D.** Secure the relay and fuse on the driver side in an upright position, as shown, to prevent moisture from entering. Di-electric grease may be applied to prevent corrosion.

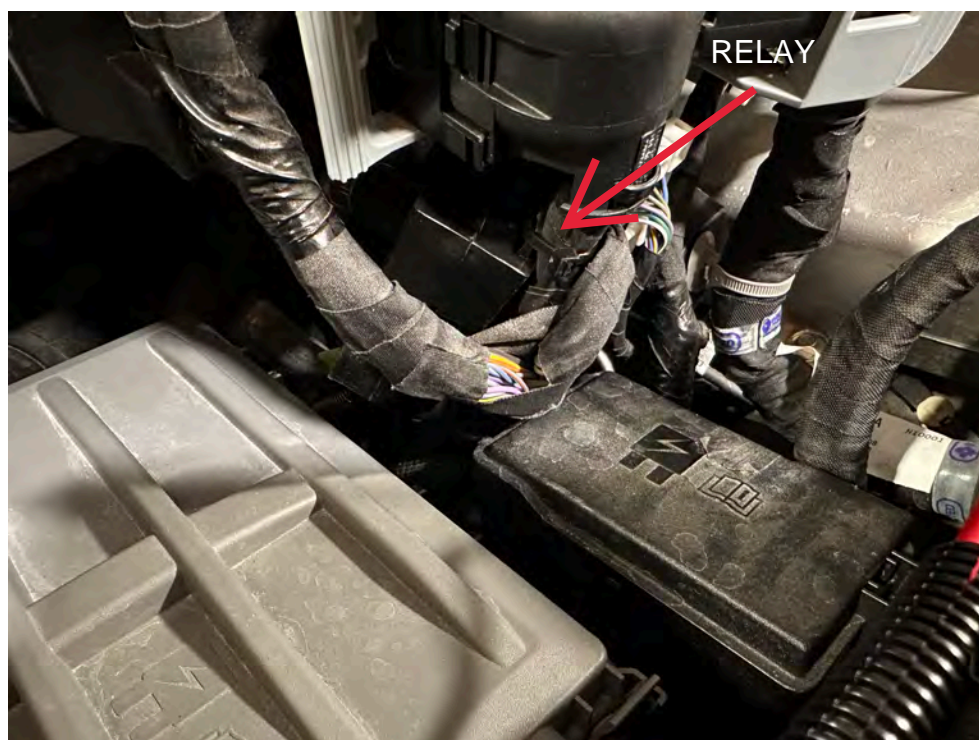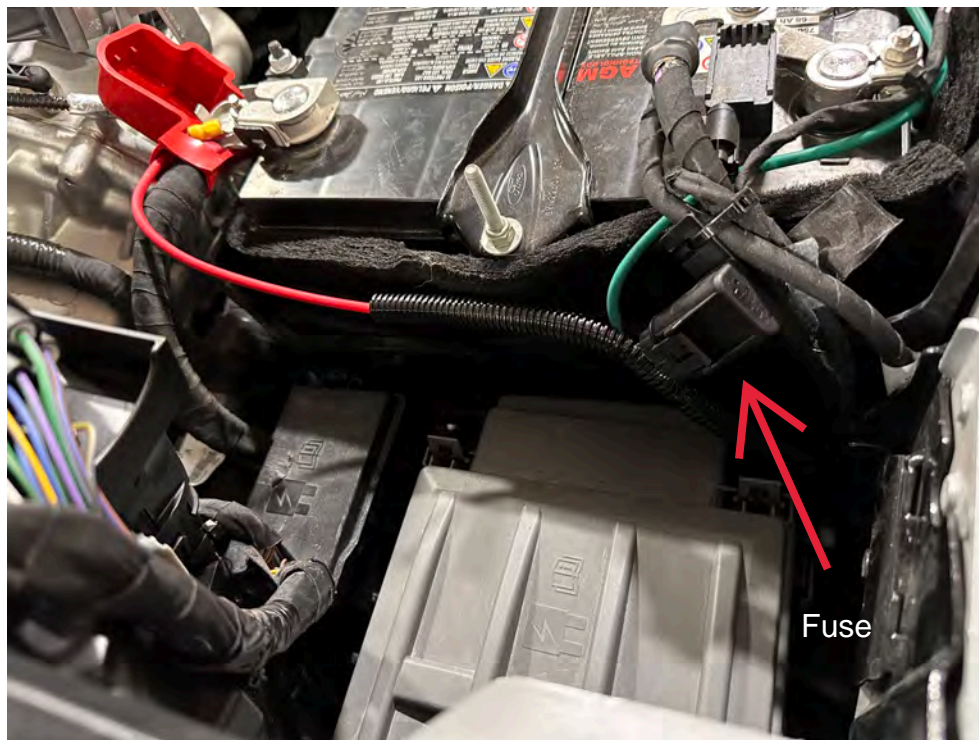



## ***STEP 1:*** ***INSTALL ELECTRICAL HARNESS***

**E.** Install the supplied 1,200° F heat shielding onto the single red wire section of WH-1006-3. Be sure the heat shielding is installed over the existing plastic wire loom!




## **STEP 1:** **INSTALL ELECTRICAL HARNESS**

F. Route the single red wire of WH-1006-3 to the engine bay fuse panel on the passenger's side. Remove a fuse (maximum of 10A) that is "hot" when the key is on. Use a test probe to locate the "hot side" of the circuit in the fuse block. Install the Add-A-Circuit into the open location. Install the pulled fuse into the open space on the fuse tap.



## **STEP 1:** **INSTALL ELECTRICAL HARNESS**

**G.** Secure WH-1006 to the fire wall using the (2) supplied tube clamps, use the 2 retainer clips to mount the tube clamps. **BE SURE THE 1,200° F HEAT SHIELDING IS CENTERED OVER THE ENGINE!!!**

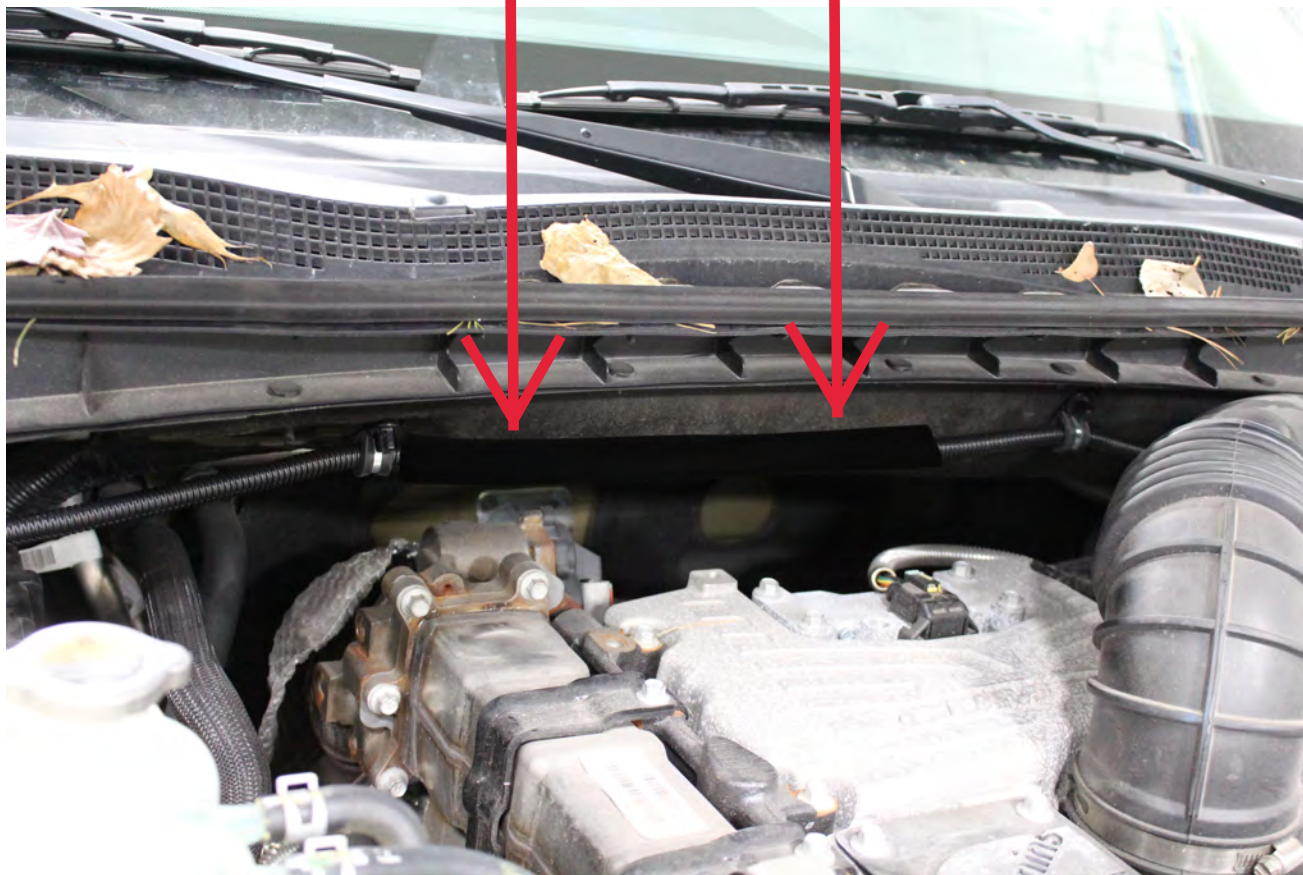



[www.fassride.com](http://www.fassride.com)  
(866) 769.3747

## ***STEP 1:*** ***INSTALL ELECTRICAL HARNESS***

**H.** Route WH-1006-3 wire harness along frame rail to mounting location of pump.  
Completion of this step will be addressed in the Mounting Step 3.



## **STEP 2:** **PREPARE SUCTION & RETURN LINE**

Some of the photo's are of a different application, procedures are the same..

**NOTE:** Before installing fittings make sure to inspect for burs or flare imperfections.  
When cutting fuel line make sure to blow out line to keep debris from moving forward.

**Helpful Hint:** Directions for removing factory lines.

1. Pull up on the locking tab (either green or red).
2. Pull straight out on the connector.





## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

- A.** Remove the (3) 12mm bolts from the OEM fuel filter debris shield.



## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

- B.** Drain the OEM fuel filter housing and disconnect the (2) electrical connectors.



## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

- C. Disconnect the (4) fuel connectors from the OEM fuel filter housing.



## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

- D. Remove the (4) bolts that secure the OEM fuel filter housing and remove the housing from the truck.





## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

- E. Remove the fuel tank skid plate, disconnect the fuel fill and vent tubes.





## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

F. With the fuel tank empty of fuel, remove it from the truck.



## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

**G.** Remove and discard the fuel tank module shield, this will no longer be used. Clean the fuel module area then remove the lock ring on the top of the fuel tank. This is spring loaded, so, holding it down while removing the ring will prevent the sending unit from popping up and possibly causing damage.



## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

**H.** Disconnect the fuel level sending unit electrical connector to prevent damage to wiring, this will be reconnected prior to reinstalling the fuel tank module.





## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

- I. Carefully remove all sections of the OEM convoluted tubing from the fuel tank module using a utility knife. Be sure not to damage the hose barb beneath the convoluted tubing.





## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

J. Using BHN-1005, mark the mounting location for BHF-1010. With a 7/8" hole saw, drill the marked location. Be sure to remove any remaining burrs to ensure a proper sealing surface.



## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

- L. Install A614C56-55-05 onto the OEM suction line on the fuel tank module. Press the locking tab of A614C56-55-05.






## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

**M.** Install BHF-1010 onto the fuel tank module with OR-119, apply Loc-Tite onto threads and install BHN-1005 onto BHF-1010. Tighten BHN-1005 to BHF-1010 accordingly.

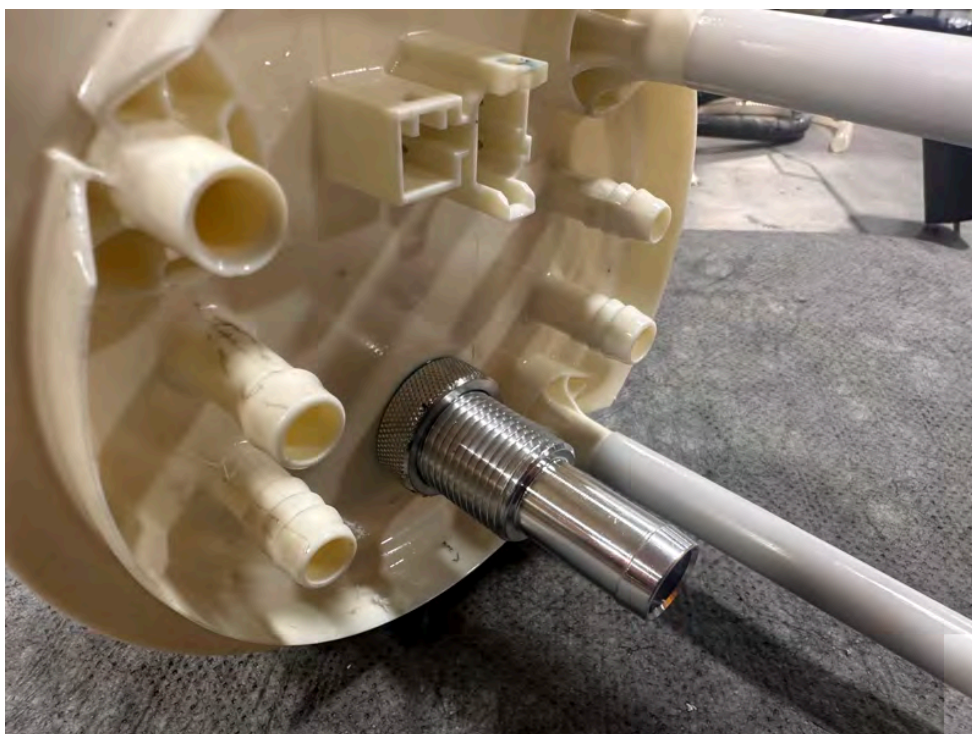

## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

**VERY IMPORTANT:** Support fuel tank on both ends allowing the natural formation of the tank to take place. Failure to perform this step will hinder precision installation.



**FUEL TANK SUPPORTS**



## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

**N.** Using a tape measure, measure from the bottom of the fuel tank to the top of the o-ring sealing surface where the fuel tank module makes contact and take note of the measurement. Compress fuel tank module to the exact height measurement taken in previous step, measure and mark ST-1005P with  $1/4$ - $1/2$ " clearance from bottom of fuel tank module. Cut ST-1005P to length and install onto BHF-1010 with hose clamp HC-1001. **NOTE: ACTUAL MEASUREMENTS WILL VARY FROM IMAGES!**



## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.


- 0. Install FL-1006 onto OEM engine return barb, this will be the smaller of the 2 plastic barbs.



## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

**P.** Install FL-1009 onto the OEM engine feed barb, this will be the larger of the 2 plastic barbs. Reconnect the fuel level sending unit electrical connector and secure the tubing/wiring together with the supplied cable ties.

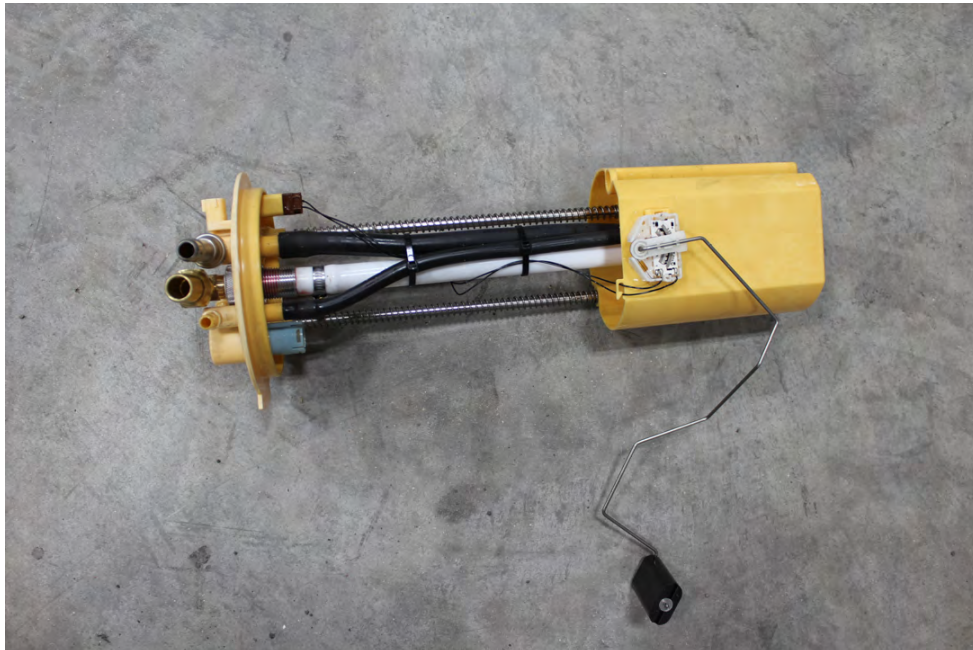

## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.

**Q.** Carefully reinstall the fuel tank module into the fuel tank, reinstall the locking ring. Install FL-1058-BK onto PL-2058-BK using oil and connect to BHF-1010. Install FL-1002-BK onto A614C56-55-05 with HC-1001.





## **STEP 2:** **PREPARE SUCTION & RETURN LINES**

Some of the photos are of a different application, procedures are the same.


R. Remove and discard the OEM fuel feed line from the truck, this will no longer be used.




**NOTE:**

**ATTENTION:** While installing fittings into Titanium pump  
**DO NOT** Apply side pressure to draw tube of pump

**PROPER**

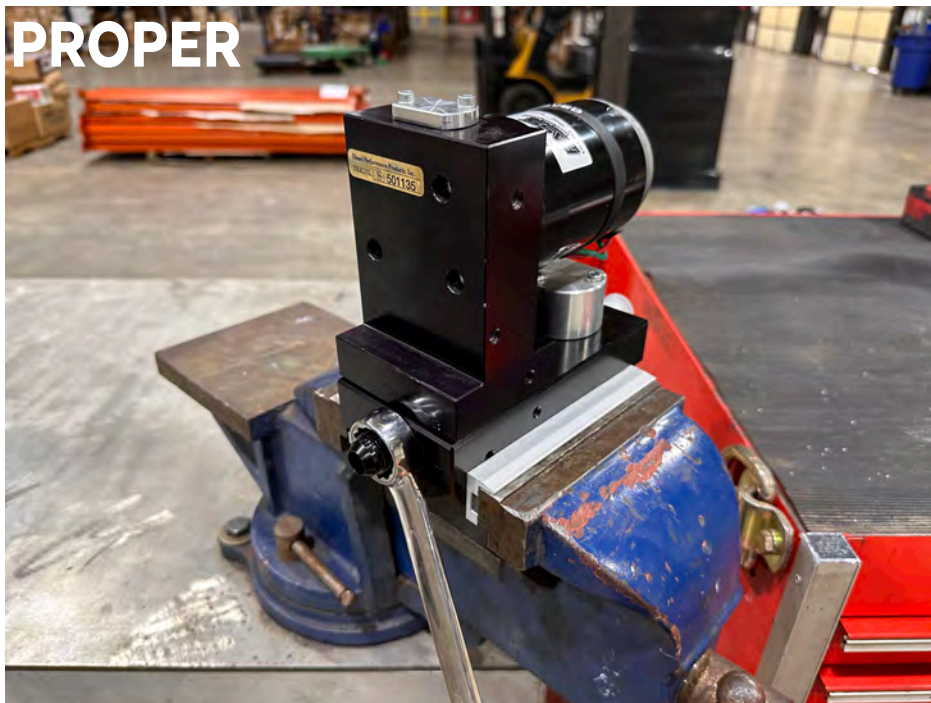

**IMPROPER**

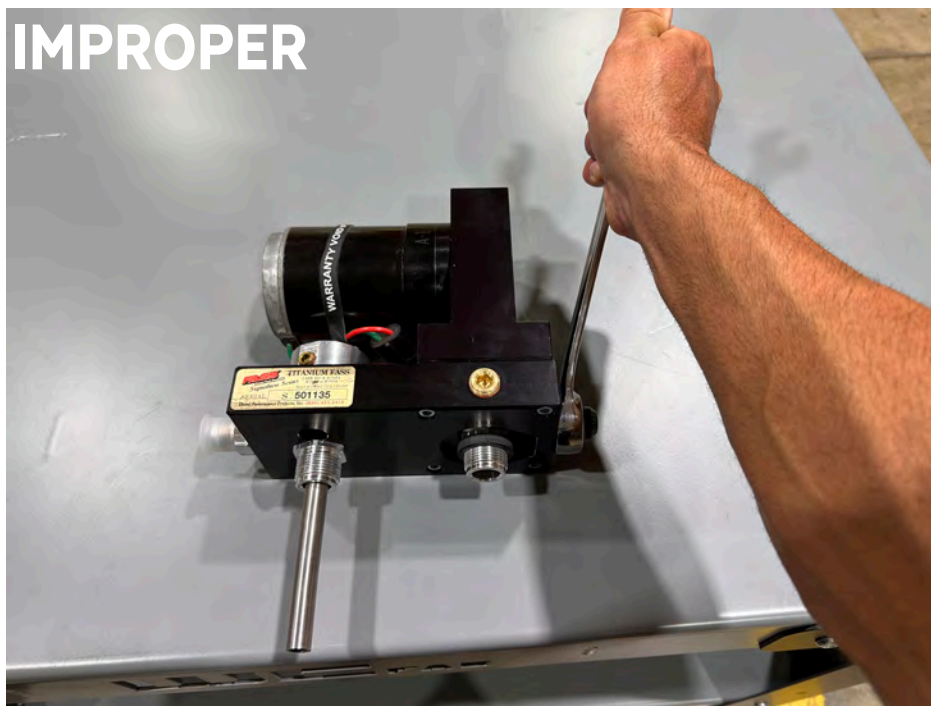

## **STEP 3:** **MOUNT FUEL SYSTEM**

**NOTE: Before installing fittings make sure to inspect for burs or flare imperfections. When cutting fuel line make sure to blow out line to keep debris from moving forward..**

- A.** Install AN-8-ORB-10-BK into the "E" port and AN-10-ORB-10-BK into the "T" port of the FASS, torque to 18ft./lbs.





## **STEP 3:** **MOUNT FUEL SYSTEM**

**B.** Install NTFB-1001 onto the LH OEM fuel pump mounting stud, reinstall existing 12mm nut and 12mm bolt. Tighten accordingly.






## **STEP 3:** **MOUNT FUEL SYSTEM**

**C.** Install RS-2002 onto PBR-2002. Install PBR-2002 onto NTFB-1001 with the (4) 3/8" bolts and (4) 3/8" flat washers. Leave the 4 bolts loose, these will be tightened at a later time.



## **STEP 3:** **MOUNT FUEL SYSTEM**


**D.** Install (3) 1/4" bolts with (3) WA-1001D spacers as pictured below. Tighten the (4) 3/8" bolts from step C, be sure PBR-2002 is level.

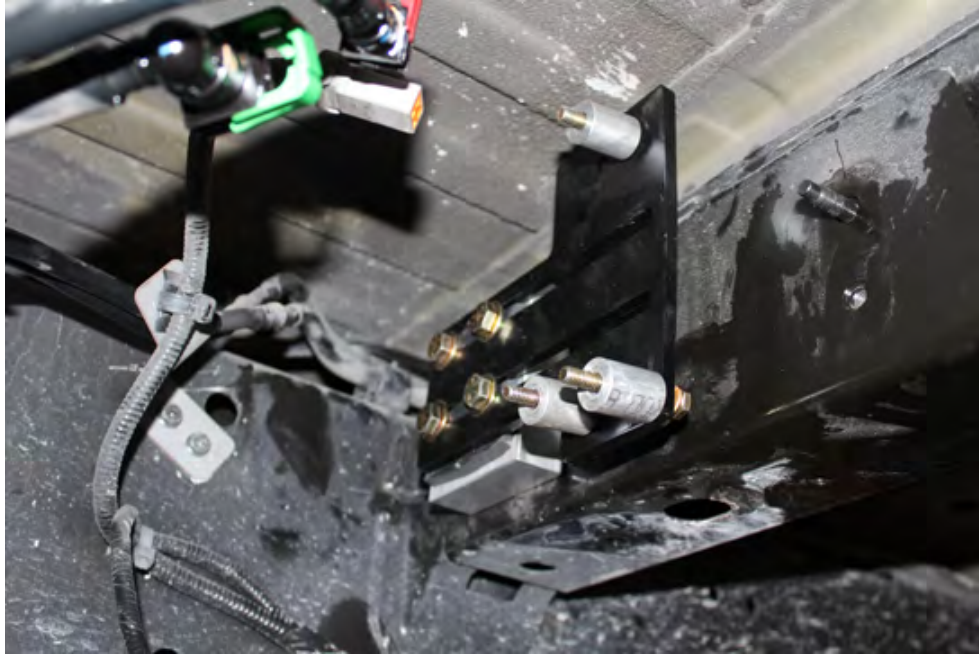



## **STEP 3:** **MOUNT FUEL SYSTEM**

E. Install the FASS onto the (3) 1/4" mounting bolts and tighten accordingly.

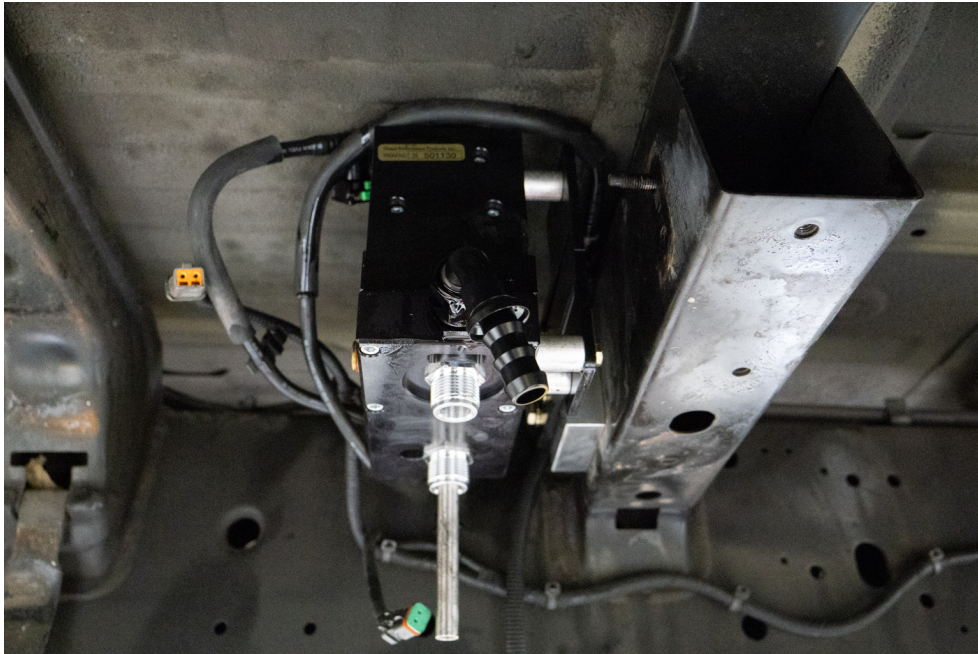

## **STEP 3:** **MOUNT FUEL SYSTEM**

**NOTE: If fuel pressure gauge is pulsating after FASS installation, use snubber valve (Cat Part # 7S-3795)**

- F. Apply motor oil to gasket located on filters. Attach to system and hand tighten.



**Extreme Water Separator -**  
Install XWS-3002 on side of  
pump with draw tube in the  
middle of the filter nipple.



**Particulate Filter -Install PF-3001 on**  
filter nipple without the draw tube.  
Make sure to insert O-Ring provided  
on nipple.



**Note: O-Ring must be put back on suction side of pump. Failure to do so can result in priming issues, cavitation or pressure losses.**



## **STEP 4:** **INSTALL FUEL LINES**

- A. Reinstall the fuel tank by reversing steps taken for removal.




## **STEP 4:** **INSTALL FUEL LINES**

- B.** Install DB-1010 into the OEM fuel injection system return lines, be sure to relock safety tabs.



## **STEP 4:** **INSTALL FUEL LINES**

**C.** Install PL-2058-BK onto AN-10-ORB-10-BK, route FL-1058-BK to PL-2058-BK. Cut FL-1058-BK to length and install onto PL-2058-BK using oil.

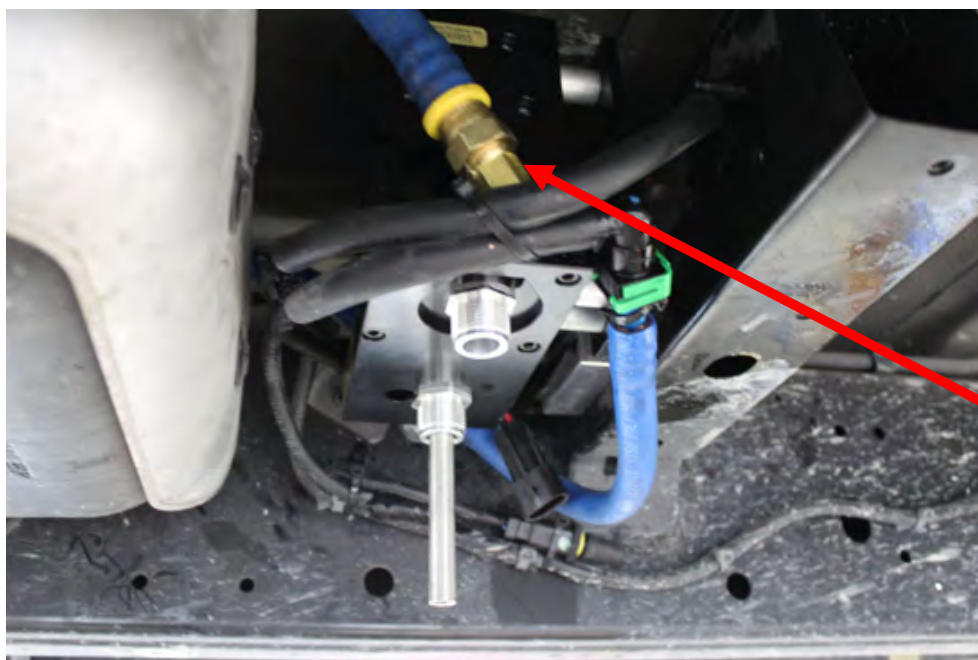

## **STEP 4:** **INSTALL FUEL LINES**

**D.** Loosely install PL-2003-BK onto the FASS return fitting, Cut FL-1002-BK to length and install onto PL-2003-BK using oil. Remove PL-2003-BK from the FASS, this will be reinstalled at a later time.





## **STEP 4:** **INSTALL FUEL LINES**

**E.** Install the remaining section of FL-1002-BK onto PL-2003-BK using oil. Install PL-2003-BK onto the FASS engine feed fitting AN-8-ORB-10-BK, in some cases it may be necessary to remove the FASS return fitting. If removed, be careful to not damage the FASS pressure spring!



## **STEP 4:** **INSTALL FUEL LINES**

**F.** Install PLB-1212 into the OEM engine feed line, install FL-1002-BK from the FASS engine feed line onto PLB-1212 using oil. It may be necessary to trim FL-1002-BK to length!



## **STEP 4:** **INSTALL FUEL LINES**

- G.** Install PL-2003-BK from step D. onto the FASS return fitting and tighten.



## **STEP 4:** **INSTALL FUEL LINES**

**H.** Remove the water-in-fuel sensor from the OEM fuel filter housing, install RVC-38 onto the WIF sensor. Reconnect WIF sensor plug to the wire harness on the truck, secure wiring with cable ties.






## **STEP 4:** **INSTALL FUEL LINES**

I. Using electrical tape, seal the OEM fuel pump connector to prevent road debris from entering. Reinstall the OEM fuel pump debris shield. Secure wiring from OEM connectors with cable ties.



## **STEP 4:** **INSTALL FUEL LINES**

J. Connect electrical connector on the FASS to the WH-1006-3, turn the key to the "RUN" position and spray WD-40 into the suction side of the FASS. This will allow easier priming of the FASS System.

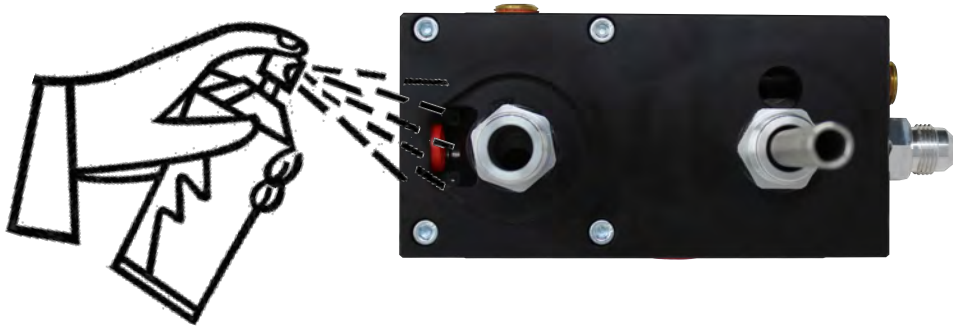


## **STEP 4:** **INSTALL FUEL LINES**

**K.** Secure all fuel lines and electrical components away from any moving parts using supplied cable ties.





## **STEP 5:** **REVIEW INSTALLATION**

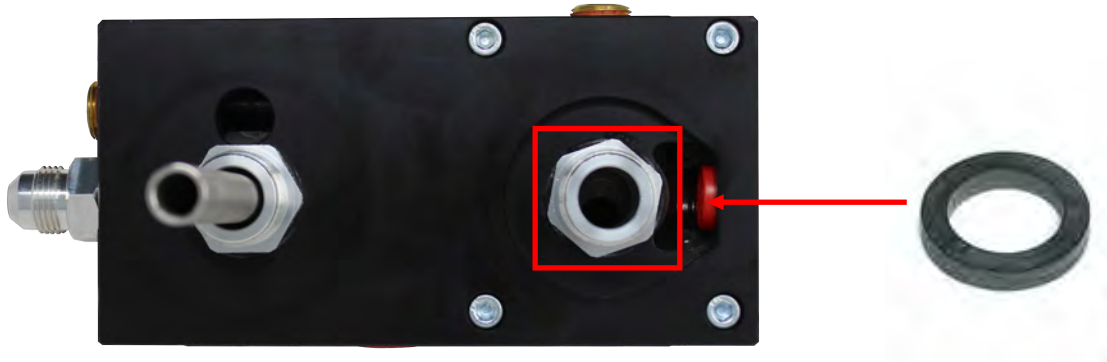

**Note: O-Ring must be put back on suction side of pump. Failure to do so can result in priming issues, cavitation, or pressure losses.**

1. **Blow out any open lines/cover any open ports**
2. **Bolts and fasteners properly tightened?**
3. **Electrical harness and fuel lines secured and properly tightened? Reconnect the battery.**
4. **Has the system been primed?**
  - a. **Turn key to the ignition position, turning on the FASS pump for 15 sec..**
  - b. **Crank engine and allow to run for at least 1 minute.**
5. **Check for leaks.**
6. **Start the engine**
7. **Recheck all fluid and filter connections for leaks**
8. **This pump comes with a 1 Year Manufacturer's Warranty based on the date it has been manufactured. To receive your extended Lifetime Warranty, you have 30 days from date of purchase to send the completed warranty information**



[www.fassride.com](http://www.fassride.com)

(866) 769.3747

## **LIMITATION OF LIFETIME WARRANTY**

**Disclaimer:** To help insure you receive the proper system and customer support at the local level, FASS has a VIP and Authorized Dealer network representing FASS products. This is one reason you must purchase through a dealer to comply with our warranty policies. If you do not, there is no warranty! We recommend you go to [www.FASSride.com](http://www.FASSride.com), click "Find a Dealer", put in their ZIP code, select the type of dealer, and see if the company you purchased from is listed. If they are not, put their phone number in the field below the ZIP code field to see if they are listed. Below these two fields is a list of "Terminated/Unauthorized" dealers. You may want to review this list. If the company is not listed or is on the "Terminated/Unauthorized" list, we suggest you return the product immediately to that dealer and call FASS. We'll recommend you to the nearest dealer.

Diesel Performance Products, Inc. (hereafter "SELLER") gives Limited Warranty as to description, quality, merchantability, fitness for any product's purpose, productiveness, or any other matter of SELLER'S product sold herewith. The SELLER shall be in no way responsible for the product's open use and service and the BUYER hereby waives all rights other than those expressly written herein. This Warranty shall not be extended or varied except by a written instrument signed by SELLER and BUYER.

When MANUFACTURER receives the "ORIGINAL" PRODUCT REGISTRATION form with a copy of the "BILL OF SALE/SALES RECEIPT" within 30 days of the sale, then the following applies! The Warranty will then and only then be validated to that of which typically accompanies your unit for your specific application from the date of sale or for recommended service life and limited solely to the original purchaser and/or vehicle and parts contained within the product's kit. This warranty does not cover normal wear on consumable items such as but not limited to filters, fuel line, wire harness & etc. The warranty does not cover seized gears due to lack of filtration. Warranty is voided if used with other than diesel fuel. Returned items will arrive prepaid to the place of purchase. Diesel Performance Products, Inc. will repair, without cost, any product found to be defective during the warranty period; parts only, or at its option, will replace such products in exchange for the product. Repair or replacements are warranted for the remainder of the original warranty period. All Warranty claims are subject to approval by Diesel Performance Products, Inc.

A Return Material Authorization (RMA) number must be obtained before any product is to be returned to Diesel Performance Products, Inc. for warranty consideration, repair or product return. Requests for product returns must be offset by an equal value order. Return parts must be completed and in resalable condition. No returns after 30 days.

The following information is required to obtain a RMA number before returning product:

Your Name, Address, and Phone Number's

Model and Serial Number (Not Motor Number) Example: Model HD Series, Serial: 00125966 VIN Number of Vehicle

Date of Purchase

Nature of Problem

RMA and Product Serial Number must be on all paperwork and correspondence. Failure to obtain the required information or paperwork will result in \$25.00/item penalty and delay or denial of any warranty claim.

Under no circumstances shall the SELLER and/or MANUFACTURER be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or reinstallation of this product, or any other contingent expenses.

Under no circumstances shall the SELLER and/or MANUFACTURER be liable for any damage or expenses insured by reason of the use or sale of any such equipment. This warranty does not apply to products which Diesel Performance Products, Inc. has determined to have been misused or abused, improperly maintained by the user, or where the malfunction or defect can be attributed to the use of non-genuine Diesel Performance Products, Inc. parts.

IN THE EVENT THAT THE BUYER DOES NOT AGREE WITH THIS AGREEMENT: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT, IN A NEW AND UNUSED CONDITION, WITH A DATED PROOF OF PURCHASE, TO THE PLACE OF PURCHASE WITHIN THIRTY (30) DAYS FROM DATE OF PURCHASE FOR A FULL REFUND LESS SHIPPING.

THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTANDS THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.