


INSTALLATION INSTRUCTIONS


Rear Glass Windshield Kit: RGWS-K-RID

- Please look through and read these instructions BEFORE starting so you understand what processes you'll be doing, and possible extra tools you may need.
- Do Not discard product packaging until installation is complete and functioning properly.

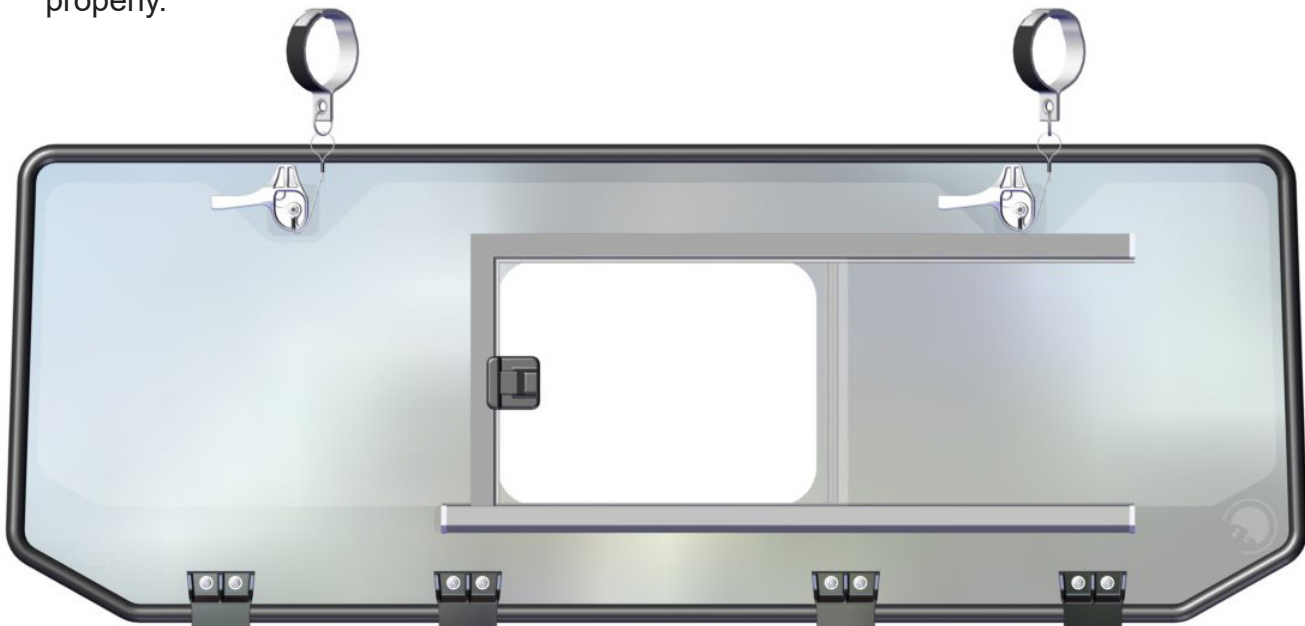


Glass Panel Assembly

**Adhesive Backed
Rubber Seal**

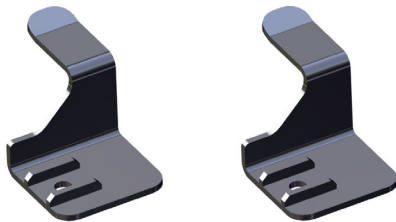

**Upper Clamp
Plates**

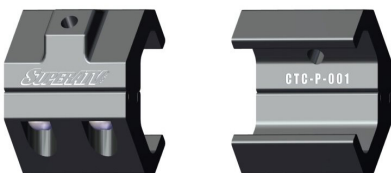

**Channel Tube
Clamps**



**M8x20
Hex Flanged
(2pcs)**



1.The first thing you need to do (if yours is not already installed) is **Install** the **Clamps** that go onto the windshield. These will go along one edge as shown in **Fig.1a**. **Fig.1b** shows the **Clamps** you will be installing by placing them over the holes in the windshield and using **Two (2) Screws, Flat Washers, Rubber Washers** and **Nylock Nuts** provided in your kit, in the next step.



Fig.1a



Fig.1b

2.To install the **Clamps**, use the **Socket Head Screws,Flat Washers** and **Rubber Sealing Washers** on the opposite side of the Windshield the Clamps are on and feed the hardware thru the Windshield and up thru the Clamp Holes. Then install the **Nylock Nuts** to the Screws. **Fig.2a** shows the order in which you install the washers onto the screw, and **Fig.2b** shows the hardware inserted into and up thru the Clamp, Wash-

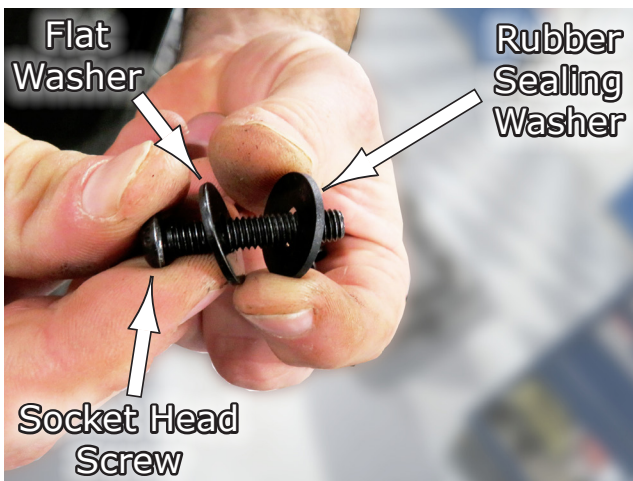


Fig.2a

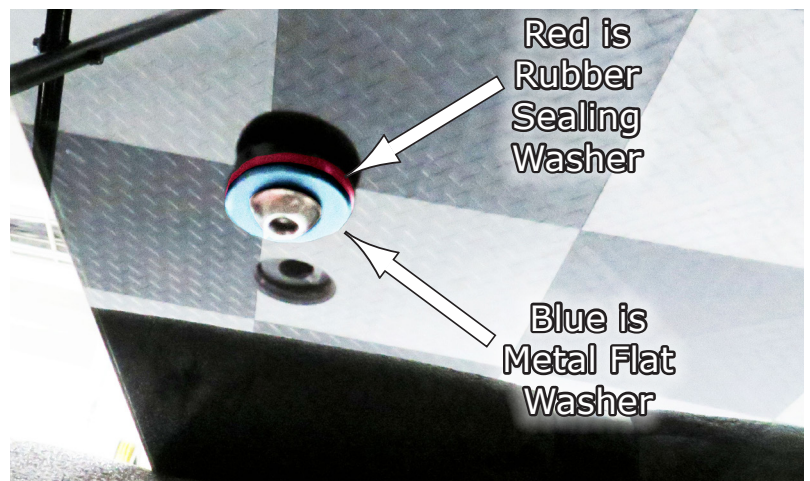


Fig.2b

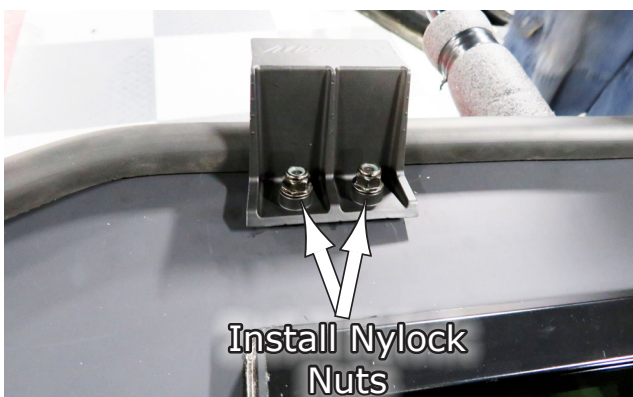


Fig.2c

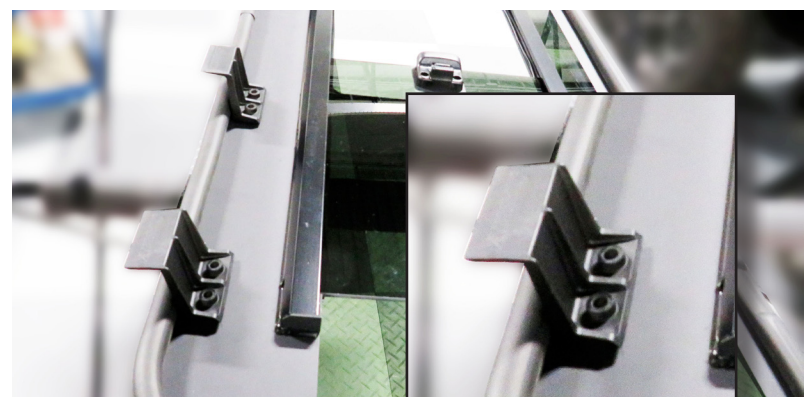


Fig.2d

3.Next, you need to cut to size and install a small piece of **Adhesive Seal** to one side of each **Clamp**, the side that comes in Contact with your vehicle. **Fig.3a** shows where to place this seal on each of the Clamps. **Fig.3b** shows **Seals Installed**. See **Fig.3a-b**.



Fig.3a

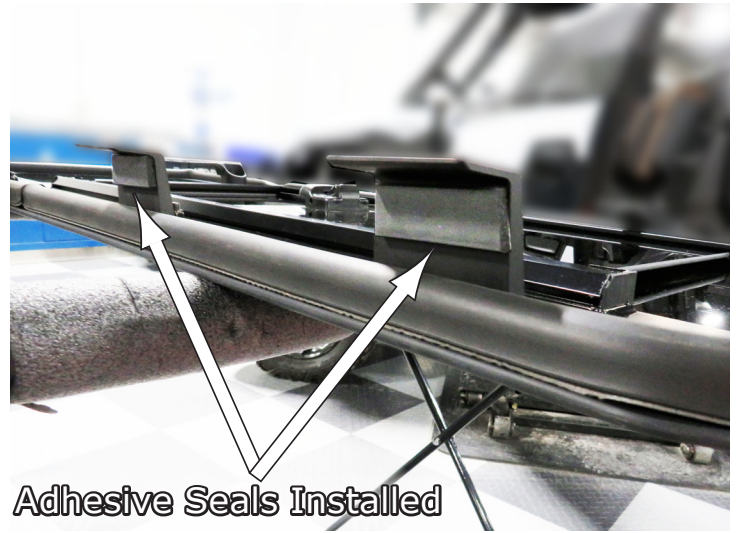


Fig.3b

4.Once the window is ready, you can now install the **Windshield Clamps**. **Fig.4a** shows the **Clamp**. There are **Two (2) Clamps** to install. To place them in the general location on the bar, you will need to place them onto the upper rear bar in the position shown in **Fig.4b**, and measure **8-1/2"** from the edge of the vertical framing to the outside surface of the clamp, also shown in **Fig.4b**. Repeat this same measurement procedure for the opposite side. Once the clamp is in position, lightly snug the screws to hold in place, but don't tighten down as you may need to adjust them the holes on the Windshield in the coming steps. See **Fig.4c**.



Fig.4a

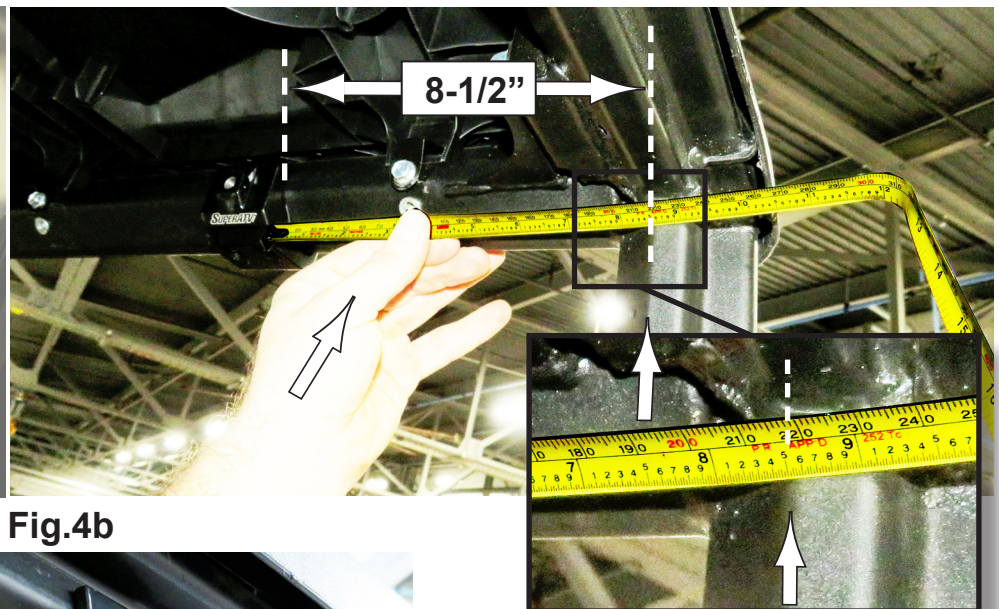


Fig.4b



Fig.4c

5. Now find the **Windshield Brackets** as shown in **Fig.5a**. Then mount it to the **Clamp** you just installed using the **Hex Flanged Bolt** from your kit in the orientation shown in **Fig.5b-c**.
(NOTE: We are showing this **Clamp and Bracket** mounted on the **Driver's Side** above the **back window**. The other side will be installed in the same orientation as this one) Repeat these same procedures for the other side **Clamp and Bracket**.

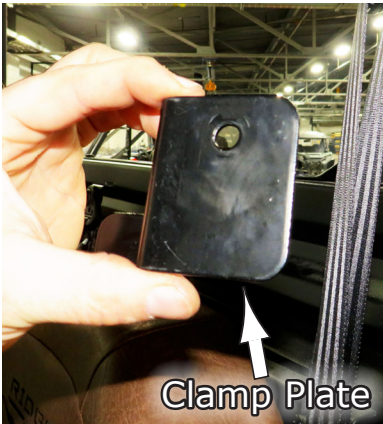


Fig.5b



Fig.5c

6. Next, install the Windshield resting the clamps on the bed frame as shown in **Fig.6a**, pull the top portion of the Windshield towards you tightly up against the window frame, **Fig.6b**, and lock the window in place using the windshield rotating latch handles as shown in **Fig.6c**.

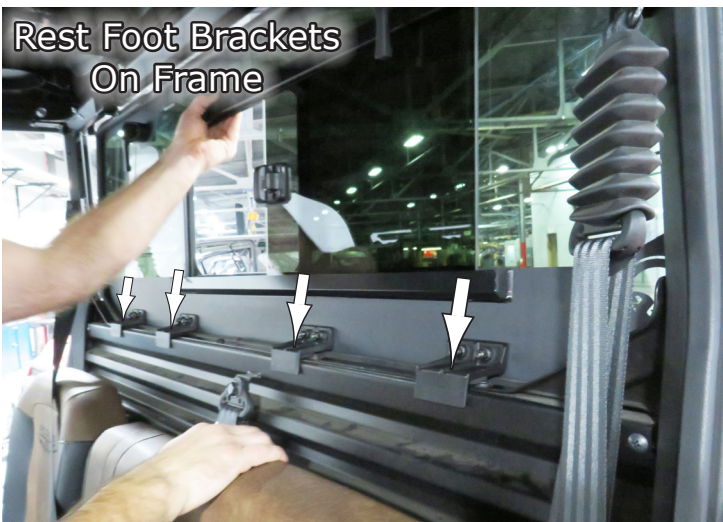


Fig.6a



Fig.6b



Fig.6c



Liability Statement

SuperATV's® products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV® and is not recommended. SuperATV's® products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV® to verify that they will work together.

Although SuperATV® has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV® urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV® products, user agrees that should damages occur, SuperATV® will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV®, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV®. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV® will warranty only parts provided by SuperATV®. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV®. SuperATV® parts and products are not warranted if item was not installed properly, misused, or modified.

Installing, adding, modifying, or fabricating any factory or aftermarket product to your ATV/UTV may violate certain local, state, and federal laws. Be advised that laws vary depending on town, city, county, state, etc. Use of certain products on public streets, roads, or highways may be in violation law. The Buyer is solely and exclusively legally and personally responsible for any violation of the law by the installation or use of the product. You must abide by all local, state, and federal laws, including but not limited to vehicle safety, traffic laws, and ordinances. It is your responsibility to know the laws and how they apply to you.

The Buyer is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications, warnings and instructions and agrees to hold SuperATV® harmless from any damage resulting from failure to adhere to such specifications, warnings and/ or instructions. The Buyer is also responsible to obey all applicable federal, state, and local laws and ordinances when operating his/her vehicle while using this product, and the Buyer agrees to hold SuperATV® harmless from any violation thereof.

If you have any problems/questions on this kit, contact us by email at [Superatv.com](mailto:sales@superatv.com).

Need help with your installation?



sales@superatv.com



www.superatv.com



1-855-743-3427



8:00am - 9:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

*Thank You
For Choosing*



Like SuperATV on Facebook to keep up to date on new products!