

TOOLS NEEDED

- Flat head screw driver.
- Small Philips screw driver.
- Needle nose pliers.
- Paper towel.

BILL OF MATERIALS


- 1 Upper dash panel .

Other Jeep JK Products

- KJ09138 3/4" Front & rear lift
- KJ09137 1 3/4" Front & rear lift
- KJ09153 3" Complete kit
- KJ09156 4" Combo kit
- KU70034 Ft lower control arms
- KU70033 Rear upper control arms
- KU70037 Rear lower control arms
- KU70091 poly flex tool
- KU11005 Poly lube gun
- KJ71030 Upper panel
- Switches for lower panel
- KU80014 Switch-red light
- KU80011 Switch-blue light
- KU80012 Switch-green light
- KU80013 Switch-amber light

NOTE: IF CLIP IS LOST USE PART #6505660AA FROM A JEEP DEALER.

ALSO AVAILABLE. KJ71030 SWITCH PANEL



KJ71020 2007 Jeep JK upper dash panel



www.Daystarproducts.com

Tech Support Contact Info

Tech@DaystarWeb.com

Phone: 623.907.0081

Fax: 623.907.0088

Instruction Sheet P11284-00

2007 Daystar Products International Inc.

Thank you for choosing Daystar

Daystar recommends a certified technician install this system . In addition to these instructions , professional knowledge of disassemble/reassembly procedures as well as post instruction checks must be known. Attempts to install this system without this knowledge and expertise may jeopardize the integrity and/or operating of the vehicle.

Please read all the instructions before beginning the installation. Check the kit hardware against the parts list. Be sure you have all the needed parts and understand where they go. If anything is missing , do not proceed with the installation, Call Daystar Products to obtain needed items.

Product Use Information

As a general rule, the taller a vehicle is the easier it will roll. We strongly recommend , because of rollover possibility, that Seat belts and shoulder harness be worn at all times. Avoid situations where a side rollover may occur.

Braking performance and capabilities are decreased when significantly large/heavier tires and wheels are used. Take this into consideration while driving, also , speedometer recalibration is necessary when larger tires are installed.

Do not add, alter, or fabricate any factory or after-market parts which increase vehicle height over the intended height of the Daystar Product purchased. Mixing component brands, lifts, and/or combining body lift with suspension lift voids all warranties. Daystar makes no claims regarding lifting devices and excludes any and all implied claims. We will not be responsible for any products that are altered.

Notice to Dealer and Vehicle Owner

Any vehicle equipped with any Daystar Product must have the “Warning to driver” decal installed on the sun visor or dash. The decal is to act a constant reminder for whoever is operating the vehicle of its unique handling characteristics. **INSTALLING DEALER**— Its is your responsibility to install the warning decal and forward these instructions on too the vehicle owner for review and to be kept in the vehicle for service life.

After installation occurs, a qualified alignment facility is required to align the vehicle to factory specs.

9. Using your hand push down on the back of the panel so the 2 clips will latch down.



10. With the panel installed you can use your favorite electronic devices.



- Using a philips screw driver install compass module onto the Daystar panel.



- Rotate the panel over so you can install the panel from the front down so it will catch the dash first.



Installation steps

- Using a flat head screw driver and a paper towel, release the clips in the rear of the stock trim panel.(Jeep part# 6505660AA)




- Lift up on the panel and pull back to release the front of the panel.



3. Turn the panel over , using a Philips screw driver , remove the 2 screws that holds the compass module and remove the module from panel.



4. Using a flat head screw driver remove the 2 clips.(Jeep p# 6505660AA)

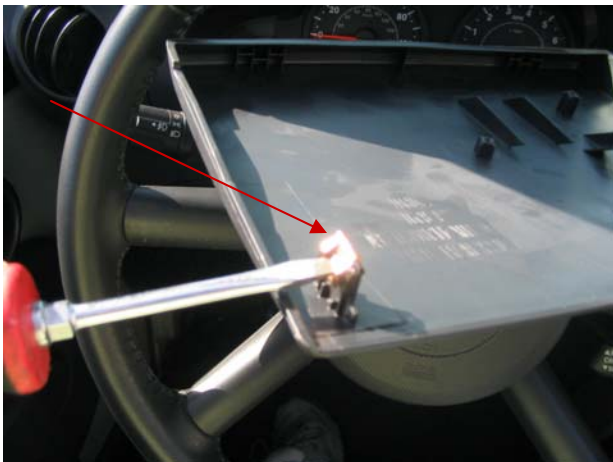

5. Using needle nose pliers compress the clips so they will clamp on the Daystar panel.



6. Install the 2 clips onto the Daystar panel using your thumb and push them on.

